

CEAB Type Pressure-Relief Electric Lubricator



CEAB-05(25W)




CEAB-05(60W)



CEAB-02

◆ Features

1. CEAB type has a timer and the timer controls the operation and interval time. The electronic box has operation, abnormal and interval indicators.
2. CEAB type has to work with volume distributors. If it is operated with CAB or CBB type volume distributor, it will feed oil during operation time. If it is operated with CDB or T type volume distributor, it will feed oil during interval time.
3. Rationing oil feeding. The flow of oil of each output point of volume distributors is equal.
4. It has a float switch that can detect the oil volume. When oil is lower than the minimum level, the float switch will automatically send a continuous signal and the buzzer will alarm.
5. It has a feed-oil button, press the button and the oil will feed immediately.
6. It used a high quality alloy steel gear pump and induction motor that not only has steady output pressure and low noise, but also can assure each lubrication point with output of oil. It can be applied for large machines' request.
7. When CEAB assembles with 25W motor, the max pressure is 20 kg/cm², the flow rate is 250cc/min. And when assembles with 60W motor, the max pressure is 30 kg/cm², the flow rate is 600cc/min.
8. CEAB 4L has pressure-regulating valve and pressure gauge for adjusting the pressure and checking if the pressure is normal.

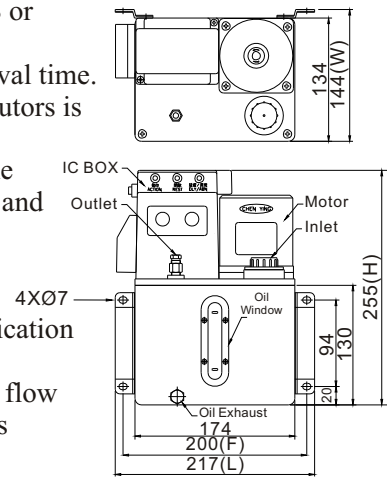

CEAB-02 Type Standards Externals


◆ Application of Machines Equipment

1. It can be used for the machines requiring strictly rationing oil flow.
2. It can be specially used for the machines requiring large oil-output and large pressure-output.

Model	Act Time	Interval Time	Motor	Max Volume	Max Pressure	1Ø Voltage	Ampere	Hertz	Discharge Bore	Oil Viscosity
CEAB	3sec-3min	1-60min	25W	250cc/min	20kgf/cm ²	110V 220V	0.7A 0.25A	50/60Hz	Ø4 or Ø6	32-68cSt@40°C
		1-180min 1-360min	60W	600cc/min	30kgf/cm ²	110V 220V	1A 0.65A			

Model	Tank Code	Tank Material	Capacity Liters	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
CEAB (25W)	02	Aluminum	2 L	200	217	144	255	5.82
	04	Resin	4 L	250	269	184	276	5.65
	05	Aluminum	4 L	280	311	184	276	6.60
	08	Iron	8 L	338	355	189	295	9.81
Model	Tank Code	Tank Material	Capacity Liters	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
CEAB (60W)	05	Aluminum	4 L	280	298	165	310	7.65
	08	Iron	8 L	338	355	190	340	10.87

CEAB Single Phase Wiring Diagram



◆ Order code :

CE AB 02 060 C 25 1 ✱

Model : Tank Capacity(Material) Interval Voltage Motor Discharge Bore Special Request
 B : 02 : 2L (Aluminum) 060 : 60min A : 110V 25 : 25W 0 : Ø4 ✱60 : 4L above metal tank could be assembled with 60W motor.
 Pressure-Relief Type 04 : 4L (Resin) 180 : 180min C : 220V 1 : Ø6 ✱90 : 4L above metal tank could be assembled with 90W motor.
 05 : 4L (Aluminum) 360 : 360min 2 : Ø4 (With Pressure Gauge)
 08 : 8L (Iron) 3 : Ø6 (With Pressure Gauge)