


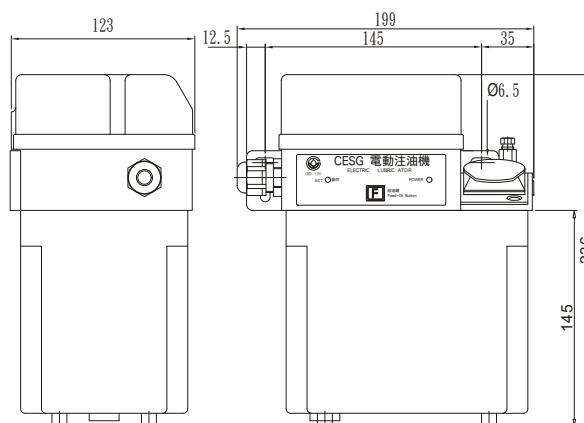


CESG01-01 Type Standards Externals

◆ Features

1. CESG-01 is resistance electric lubricator, which can be operated by Programmable Logic Controller (PLC), suitable to work with all kinds of straight adapters and proportion adapters.
2. It has a float switch that can detect the oil volume. When oil is lower than minimum level, the signal will automatically turn on.
3. It has a force feed-oil button (**F** button), slightly press the F button for three seconds and the oil will feed immediately.
4. Please don't press the force feed-oil button (**F** button) more than three minutes in order to avoid overloading. When the temperature reaches 100 °C, the sensor will be on to stop the motor continue running about 5 minutes.

CESG-01 Type Single Phase Wiring Diagram

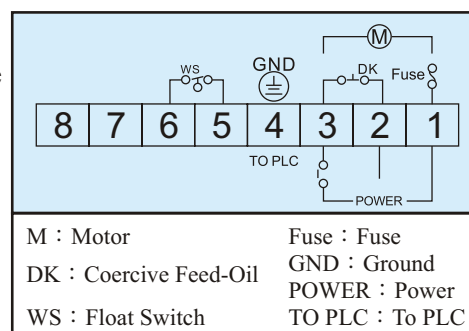

◆ Application of Machines Equipment

It usually works with Processing or Projecting or Lathes.

Model	Pressure-Relief Device	Act Time	Interval Time	Motor	Max Volume	Max Pressure	1Ø Voltage	Ampere	Hertz	Discharge Bore	Pressure Switch	Oil Viscosity
CESG01	×	Controlled by PLC		30W	135cc/min	15kgf/cm ²	110V 220V	1.6A 0.6A	60HZ or 50HZ	Ø4 or Ø6	Optional	32-68cSt@40°C
Model	Tank Code	Tank Material	Capacity Liters	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Weight(kg)				
CESG01	01	Resin	2 L	145	199	137	236	2.30				
	02	Aluminum	2 L	200	202	139	224	3.50				
	03	Resin	3 L	205	230	167	232	2.80				
	04	Resin	4 L	250	256	162	277	3.45				
	05	Aluminum	4 L	280	275	150	246	4.45				
	08	Iron	8 L	338	355	197	261	7.20				

◆ Order code :

CESG- 01

01

C

3

※

Model
01 : Resistance
Type

Tank Capacity (Material)
01 : 2L (Resin)
02 : 2L (Aluminum)
03 : 3L (Resin)
04 : 4L (Resin)
05 : 4L (Aluminum)
08 : 8L (Iron)

Voltage
A : 110V,60HZ
B : 220V,50HZ
C : 220V,60HZ

Discharge Bore
0 : Ø4
1 : Ø6
2 : Ø4 (With Pressure Gauge)
3 : Ø6 (With Pressure Gauge)

Special Request
※P : Add a pressure switch
(NO or NC 1kgf/cm²)