

0.8t → 6.3t

V LEVER

VR2

Light  
Weight,  
High  
Quality!

For plated parts,  
we use  
trivalent chromate  
treatment,  
which is  
environment friendly.



Lifting



Lowering



Fastening



Pulling



VITAL brand is registered worldwide.

For Lifting, Lowering, Fastening and Pulling.

**VITAL<sup>®</sup>**  
**LEVER**

**Lever hoists**

**V LEVER VR2**


**Idling operation:**

1. Depress the retaining pawl all the way down and pull the grip ring towards you.
2. The chain can be adjusted up and down by hand.
3. To terminate the idling, set the change lever in the down (↓) position. (See diagram at right).

Then, depressing the retaining pawl as far as possible, push the grip ring gently so as to let the pawl engage the outer edge of the retaining plate.

Next, grip the grip ring and handle with a single hand and push them while turning them counterclockwise.

The retaining pawl returns to its original position.

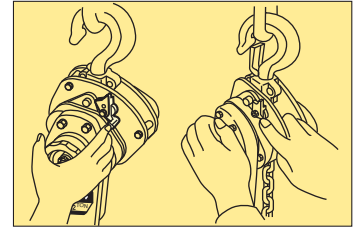

0.8 t



1 t



1.6 t



3.2 t




6.3 t

**Specifications**

Model Number	VR2-08	VR2-10	VR2-15	VR2-30	VR2-60	
Capacity (t)	0.8	1	1.6	3.2	6.3	
Standard Lift (m)	1.5	1.5	1.5	1.5	1.5	
Net Weight (kg)	6.9	7.1	9.7	16.3	26.7	
Min. Distance between Hooks (mm)	295	310	335	405	550	
Pull Required to Lift Full Load	(kgf)	15	20	18	38	39
	(N)	147	196	177	373	382
Chain thickness (mm)	6.3	6.3	7.1	9.0	9.0	
Dimension	a (mm)	148	148	163.5	191	191
	b (mm)	128	128	148	181	244
	c (mm)	295	310	325	395	550
	d (mm)	256	256	368	368	368
	e (mm)	27	30	34	43	47

\* Hoists with the life in other lengths are also available.

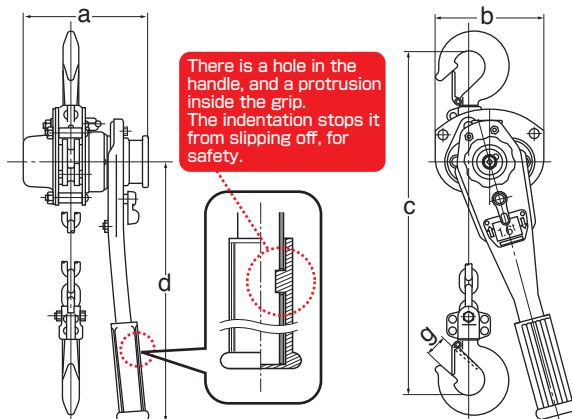

**F.N.** บริษัท เอฟ เอ็น เอ็นจิเนียริง จำกัด  
**F.N.ENGINEERING CO.,LTD.**

Tel: 0-2918-4441-2,0-2918-3378 [Auto] Hotline 08-1174-3345

Fax: 0-2918-3070,0-2918-2722

Email : sale@fnengineering.com , fnengineer@gmail.com