


# 65

## PORTABLE GREASING SYSTEM

GS-5



CONSTRUCTION



AUTOMOTIVE



AGRICULTURE

Fully Portable & single person operation manual greasing system designed for volume greasing in workshop environments, site applications, on a pick-up truck, tractor, earth moving equipment etc.

Pump is operated by foot press of the spring loaded system. The hose gets charged with grease, which can then be dispensed through the Super Gun fitted at the end of the hose. A single charge provides upto 30 shots of grease

Aluminium die cast super gun develops greasing pressure and has high pressure & high volume settings, actuated through a simple switch. High pressure setting dispenses 0.45 gm of grease in each shot at 10,000 PSI. High volume setting dispenses 1.25 gms per shot

High pressure feature is very useful to open blocked grease fittings

Pump assembly is fully sealed to prevent contamination

Pump comes complete with drum cover, rubber lined follower plate, premium 1/2" ID high pressure hose, Super gun fitted with steel extension & coupler and 11 lb. (5 kg.) plastic grease bucket

### WETTED COMPONENTS

Aluminum, Steel, Brass, Polyurethane & Nitrile Rubber

### RECOMMENDED USE

For Grease up to and including NLGI No. 2



### DELIVERS

Upto 1.25 gm / stroke on high volume setting



10,000 PSI (690 BAR)

Common sight on construction equipment requiring high volume routine greasing



CAT. NR.	ORD. NR.	BUCKET CAPACITY	PUMP LENGTH BELOW DRUM COVER	DRUM COVER DIAMETER	FOLLOWER PLATE DIMENSIONS		HOSE LENGTH
					O.D. STEEL END	O.D. PLATE	
* GS/5	44250	5 kg / 11 lb.	7-3/4" (197 mm)	8-1/2" (216 mm)	6-3/4" (171 mm)	8-1/8" (206 mm)	1.5 m

Key \* Best Seller

# 66

## BUCKET GREASERS



Volume Grease Pump designed for quick effortless greasing in applications requiring everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive applications etc.

The Pump delivers upto 9 gms (0.30 oz.) of Grease per stroke which is twice the amount of grease discharge by any other pump. Fully CNC machined to very close tolerances, the pump develops pressure upto 4,000 PSI (275 BAR)

Whereas most pumps work only with light Greases, the VGP series pumps work equally well with NLGI 1, 2 & 3 Greases

**WETTED COMPONENTS**  
Steel, Aluminum, Brass & Nitrile Rubber

**RECOMMENDED USE**  
For Grease up to and including NLGI 3



**4,000 PSI (275 BAR)**

high pressure setting

**DELIVERS**

**Upto 9 gms / stroke (0.30 oz. / stroke)**  
high volume setting


CAT. NR.	ORD. NR.	CAT. NR.	ORD. NR.	BUCKET CAPACITY
WITHOUT WHEELS		WITH WHEELS		
VGP/6A	44280	VGP/6	44290	6 kg (13 lb.)
* VGP/10A	44281	VGP/10	44291	10 kg (22 lb.)
VGP/15A	44282	VGP/15	44292	15 kg (33 lb.)
---	---	◆ VGP/20	44293	20 kg (44 lb.)

Key \* Best Seller ◆ New



**VGP/10A**  
(Without wheel)  
Capacity: 10 kgs / 22lbs.

### VARIABLE HANDLE SETTING

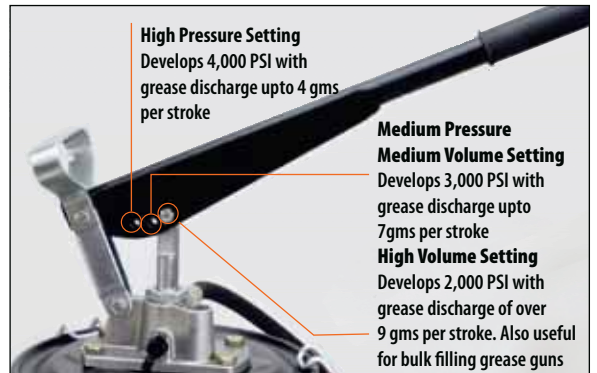

VGP-6

VGP-10

VGP-15

VGP-20

**NEW!**



**VGP/6A**

(Without wheels)  
Capacity : 6 kgs / 13lbs.



**VGP/6**

(With wheels)  
Capacity : 6 kgs / 13lbs.



**VGP/10**

(With wheels)  
Capacity : 10 kgs / 22lbs.



**VGP/15A**

(Without wheels)  
Capacity : 15 kgs / 33lbs.



**VGP/15**

(With wheels)  
Capacity : 15 kgs / 33lbs.



**VGP/20**

(With wheels)  
Capacity : 20 kgs / 44lbs.